

CP-32BZ-LB Series



Resettable Call Point Operation Manual

(Blue Backlight & Built-in Buzzer)

- Operating voltage: 12/24VDC (factory default 24VDC)
- Dimensions: 87x91x53 mm (with clear plastic cover)
- Contact resistance: 100mΩ
- Double pole: switch 1 (NC/COM/NO) 5A 125/250 VAC
switch 2 (NC/COM/NO) 1A at 30VDC
- Backlight illumination: Blue
- Built-in buzzer: 80dB
- Plastic case: Green / Red / White / Yellow / Blue
- Resettable key included

Part Number:
CP-32XBZ-LB



Green **G**/Red **R**/White **W**
Yellow **Y**/Blue **BL**

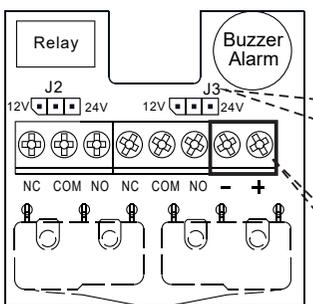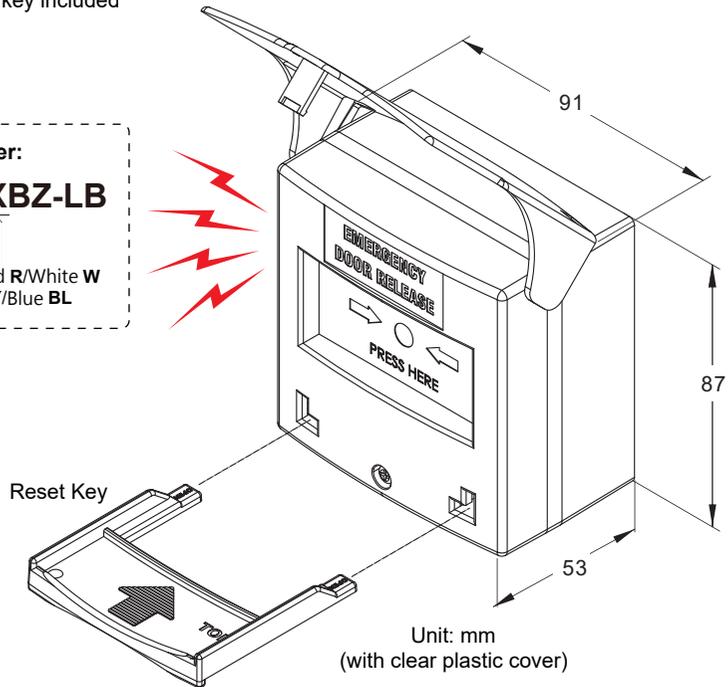


Step 1
Set the voltages at J2 and J3 by using the jumpers based on your input voltage.



Step 2
Apply power.

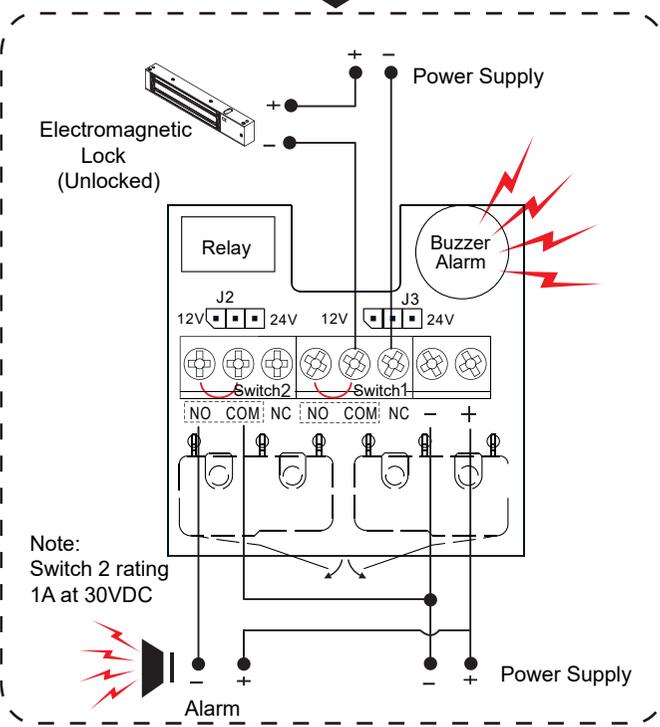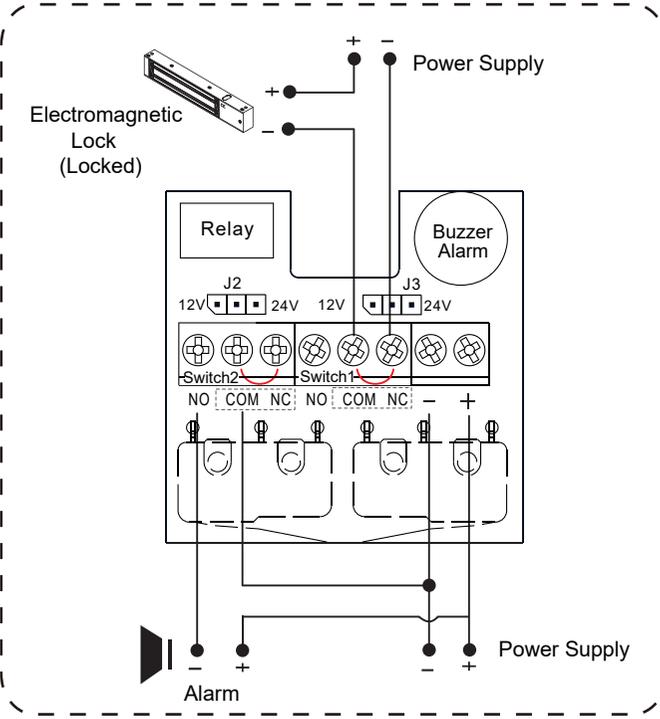

Note:
Switch 2 rating
1A at 30VDC

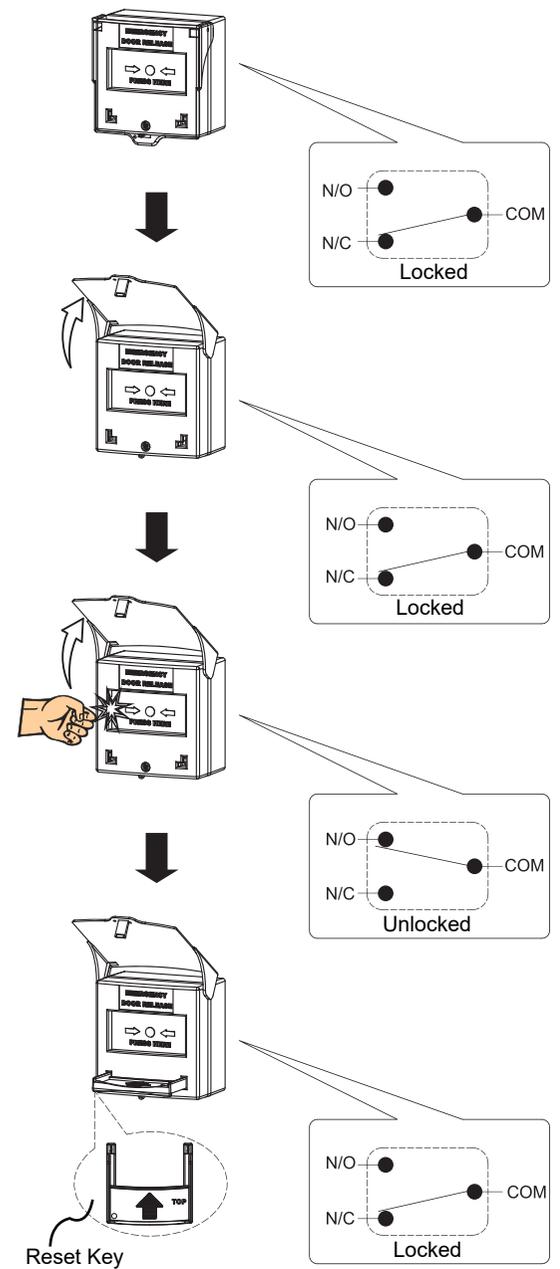



CAUTION

Voltage settings for J2 and J3 must be the same. Failure to correctly set the input voltage will cause damage to the product.

CP-32 Series Mortise Mount Installation Instructions

CP-32 Components

- 1 Plastic top cover
- 2 Main body
- 3 Reset key
- 4 Machine screw x1 (mortise mount only)
- 5 Self drilling screw x1 (surface mount only)
- 6 Hex nut x1
- 7 Hex nut spacer

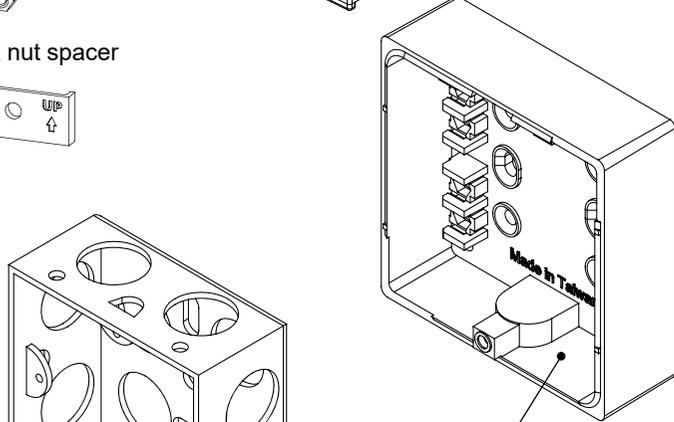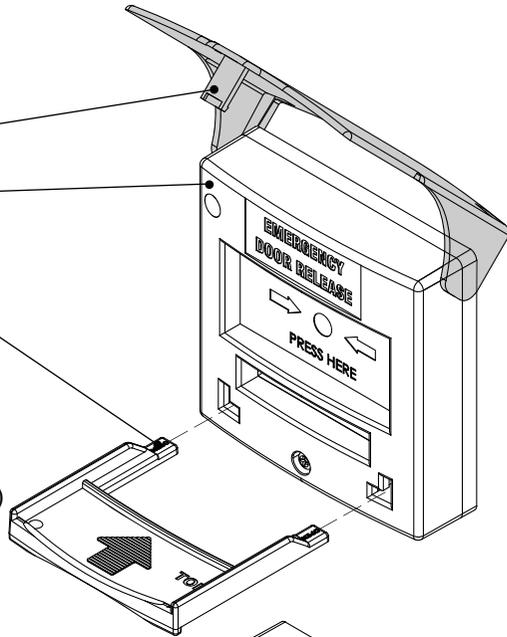

8 Base piece
(Not needed in this installation method)

Recommend using 1 gang flush mount box conformed to BS4662 (Not included)

<p>1</p> <p>Take off the plastic cover and separate the main body from the base.</p>	<p>2</p> <p>Top piece</p> <p>Middle piece</p> <p>Use the reset key to split the main body into two pieces.</p>	<p>3</p> <p>Install the hex nut on the middle piece followed by the spacer as shown.</p> <p>Complete as this:</p>
<p>4</p> <p>Use a plier to remove the hooks of the middle piece as shown.</p>	<p>5</p> <p>Align the middle piece and the mounting box and secure with two screws.</p>	<p>6</p> <p>Install the top piece as shown minding the spring in the middle.</p> <p>Tighten the machine screw to the hex nut.</p>
<p>7</p> <p>The main body is now secured to the mounting box.</p>	<p>8</p> <p>Click the plastic cover back on the front side.</p> <p>Close the plastic cover lid with the bottom secured as shown.</p>	<p>9</p> <p>Installation complete.</p>