



CP-15-GE



## Statement

The CP-15 series Break Glass call point, with single pole change over contacts from N/C to N/O. The main function is to override the electrical locking/release devices in case of emergency. With Key to replace glass.

The Break Glass call point comes with hinged front cover for monitoring N/C change over N/O to override electrical locks / release devices for emergency with key to replace glass.

## Specifications


Dimensions: 88x88x52 mm  
 Contact resistance: 150mΩ  
 Switch rating: 3A/125VAC

## Dimension


Unit: mm  
 (Common Europe Sized)

Polycarbonate  
 Hinged Cover


Built-in Key  
 (for change break glass)

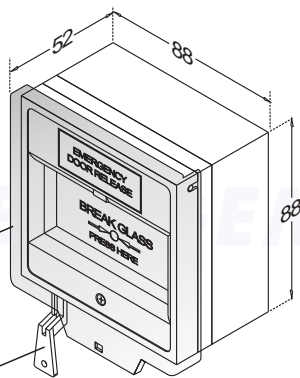

## Application

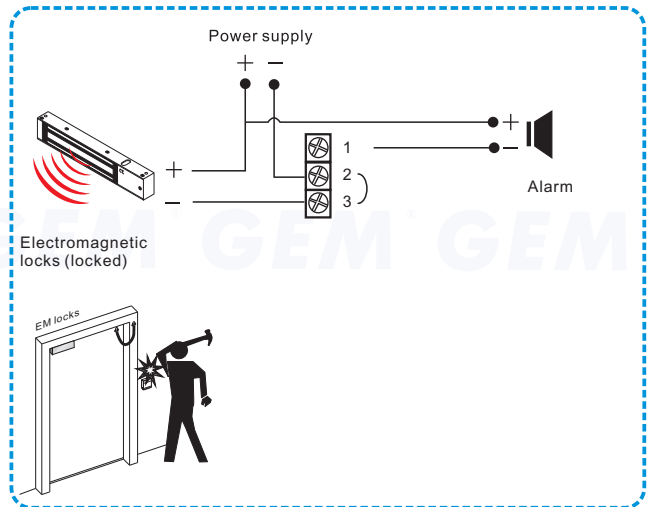

↓ (Glass is broken)

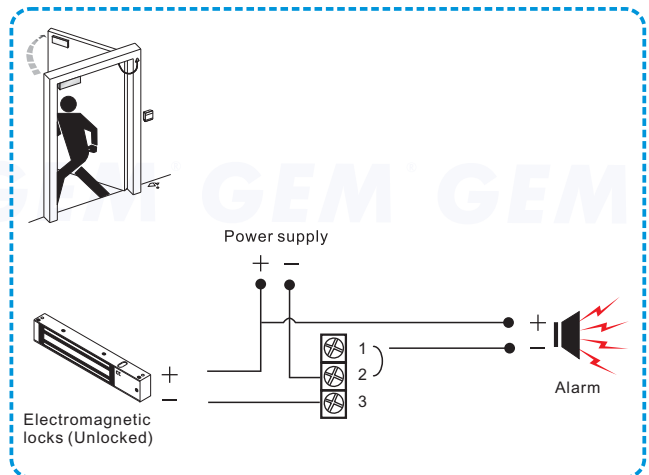

## Warranty

The product is warranted against defects in material and workmanship while used in normal service for a period of 1 year from the date of sale to the original client. The GEM policy is one of continual development and improvement; therefore GEM reserves the right to change specifications without notice.

## GIANNI INDUSTRIES, INC.