


AS-500

INPUT
12~24 VAC / VDC



N.O.
N.C.
N.C.
N.O.

+ -

EB261

SM1224BZ-1A


Blue Blue

INPUT
12~24V
DC/AC


OUTPUT
12VDC
(Max.1A)

Black Red

Jumper on pin 1 & 2 Buzz
Jumper on pin 2 & 3 Silent

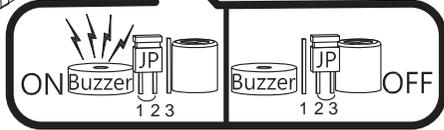

(Fail-secure)

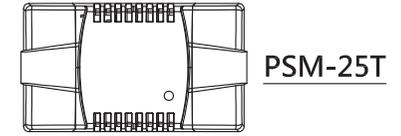

AS-500

INPUT
12~24 VAC / VDC



N.O.
N.C.
N.C.
N.O.

+ -

EB261

SM1224BZ-1A

Blue Blue

INPUT
12~24V
DC/AC

OUTPUT
12VDC
(Max.1A)

Black Red

Jumper on pin 1 & 2 Buzz
Jumper on pin 2 & 3 Silent



(Fail-secure)

* We recommend using at least a 16VAC/DC transformer for devices that require 1.0A.

* AC transformers should range from 12 to 24 VAC, and DC power supplies from 14-24 VDC.

* We recommend using at least a 16VAC/DC transformer for devices that require 1.0A.

* AC transformers should range from 12 to 24 VAC, and DC power supplies from 14-24 VDC.