

Electric Strikes

GK1276/79/96 Rim Strike Series

Surface Mount Strikes for Pullman Latch Exit Devices



(For GK1276/1296)



GK1296



GK1276



GK1279



GK1279M



The GK1276/1279/1296 ANSI electric rim strike series is surface mounted and designed with strength and durability for use with rim exit devices with a Pullman latch bolt. It features an optional latch monitor and has a stainless steel housing. No cutting on the frame is required for installation.

Standard Features

- Field selectable 12/24VDC
- Field reversible fail-secure or fail-safe
- No frame cutting required - surface mounted
- Non-handed fully reversible
- Horizontal adjustment
- Static strength 1,500 lbs (680Kg)
- Dynamic strength 70 ft-lbs
- Endurance rating 250,000 cycles UL tested, 1,000,000 cycles factory tested
- Brushed stainless steel finish (US32D)
- Latch monitor (For model with suffix M)

Patents, Approvals, and Listings



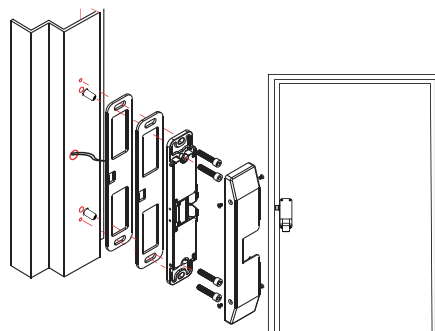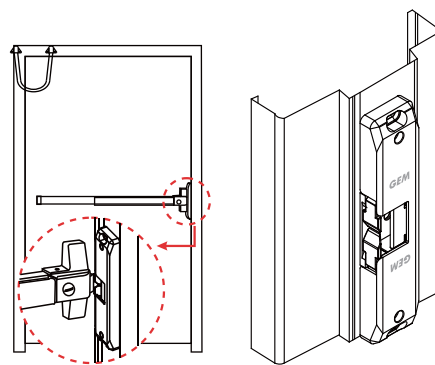





- UL 1034 burglary resistant listed: BP10269 (For GK1276/1296)
- UL 294 Access Control System listed : BP10269 (For GK1276/1296)
- Patent: Australia - 2019100081 (For GK1276)
- UL 10B/10C fire-rated (up to 1.5 hours: fail-secure only): R39009 (For GK1276)
- CAN/ULC-S104 fire door conformant: R39009 (For GK1276)




GIANNI INDUSTRIES, INC.

Tel: +886-2-2267-7986 Fax: +886-2-2267-9876
www.gianni.com.tw inquiry1@gianni.com.tw


GK1276/79/96 Series ANSI Electric Rim Strikes

Models	Voltage (VDC)	Current Draw	Latch Monitor	Housing Thickness	Field Reversible Fail-Safe Or Fail-Secure	Accessories
GK1276 <small>SECURITY</small> 	12/24	540mA/12VDC 270mA/24VDC	—	3/4" (19mm)		1/16" (1 mm) spacers
GK1276M						
GK1279	12/24	540mA/12VDC 270mA/24VDC	—	3/4" (19mm)		1/16" (1 mm) spacers
GK1279M						
GK1296 <small>SECURITY</small> 	12/24	540mA/12VDC 270mA/24VDC	—	1/2" (13mm)		1/8" (3 mm) spacers
GK1296M						


Dimensions

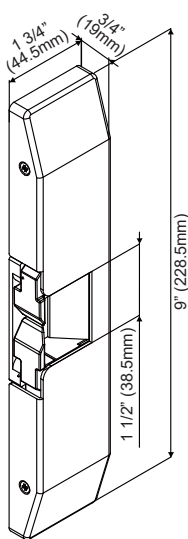


GK1276

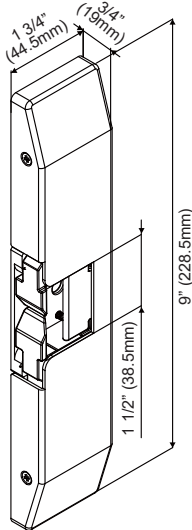



GK1276M
(Model with Latch Monitor)

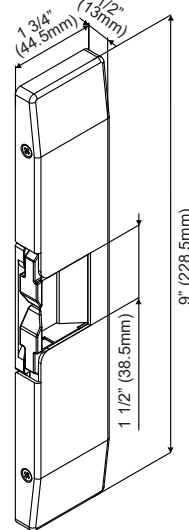


GK1296

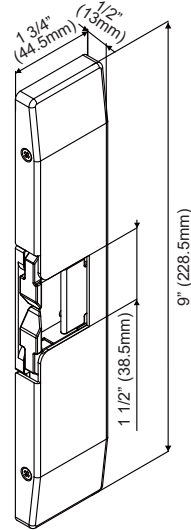

GK1296M
(Model with Latch Monitor)

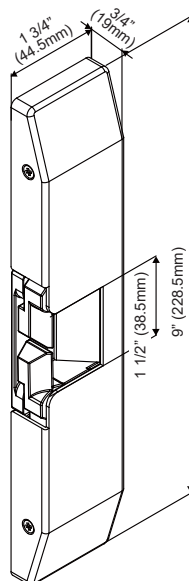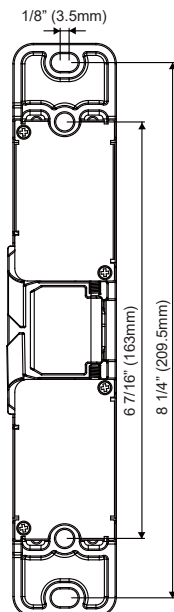


GK1279

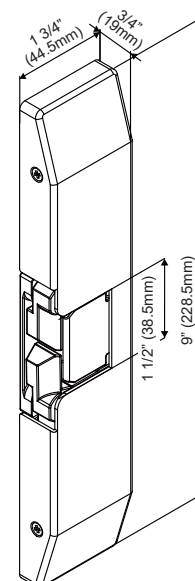

GK1279M
(Model with Latch Monitor)

Changing Fail-Safe / Fail-Secure

Fail-safe or fail-secure is field reversible by changing the position of screws. (Check screw #1 and #2 positions below)

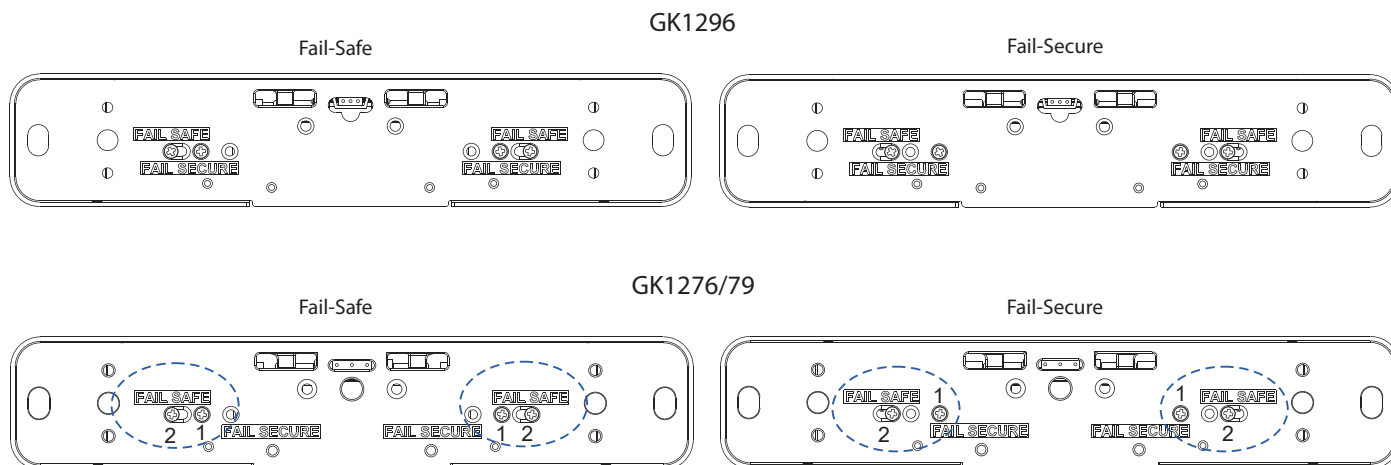

Warranty

The product is warranted against defects in material and workmanship while used in normal service for a period of 3 years from the date of sale to the original client. The GEM policy is one of continual development and improvement; therefore GEM reserves the right to change specifications without notice.

Compatible Latch Types

- For use with UK surface mounted push pad, such as Briton 378, and Briton 376 panic bolt.



GK1279



GK1279M



For GK1279 Series

- For use with ANSI standard panic exit device.



GK1276

GK1276M

GK1296

GK1296M



For GK1276/1296 Series

- For use with ANSI standard panic exit device with a deadlatch above or below the bolt.



GK1276 +

Dead latch
Ramp Adapter

GK1296 +

Dead latch
Ramp Adapter



For optional accessories **model**
(Only GK1276/1296)

- Add spacers to adjust the gap between strike and exit device if necessary.



P-LG-GK1296-1 (1mm)

P-LG-GK1296-3 (3mm)

- Surface mounting box for single rim strike on double leaf door



SMB-GK1276