

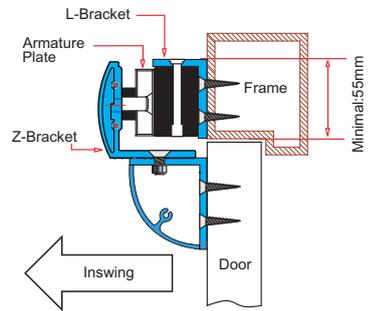


Inswing narrow frame doors


LZ-GEM-D800AU Bracket




Application for the Electromagnet: GEM-D800 Series

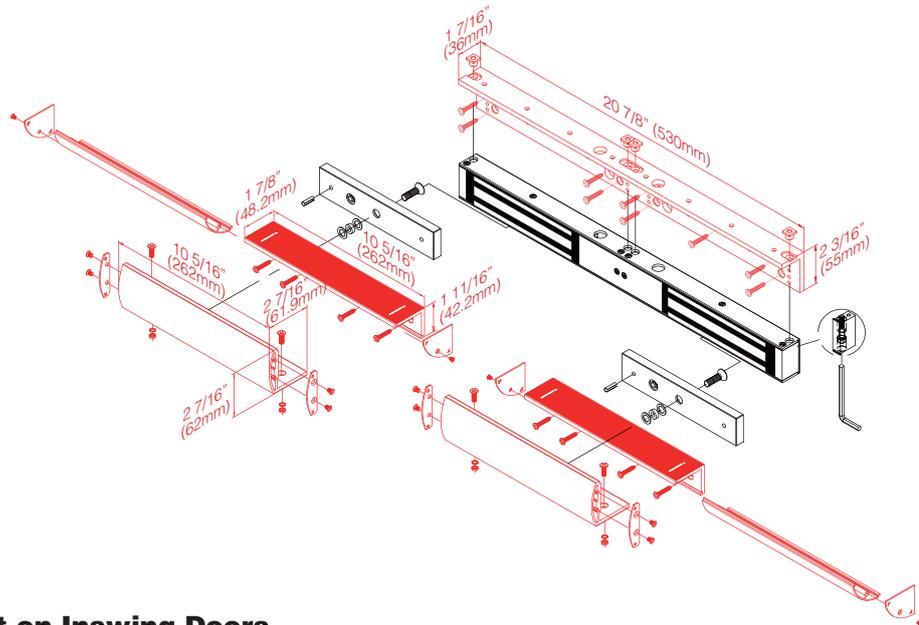


Installation of LZ bracket on Inswing Doors




1
Install L bracket on the door frame. Make sure the door may be opened / closed.




2
Fasten the electromagnet to L bracket with fixing screws.




3
Assemble Z bracket. Make sure it is still adjustable.




4
Insert the guide pins into the armature plate.




5
Fasten the armature plate to Z bracket. Insert the rubber washer between them.



6
Close the door and turn on the power.



7
Let the armature plate and electromagnet bond together. Press Z bracket to the door leaf.



Finish
Fasten Z bracket to the door leaf.



GIANNI INDUSTRIES, INC.

Tel: +886-2-2267-7986 Fax: +886-2-2267-9876
www.gianni.com.tw inquiry1@gianni.com.tw