

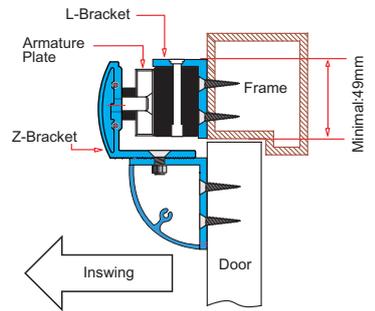


Inswing narrow frame doors

LZ-NH2300NAU Bracket



Application for the Electromagnet: EM-NH2300 Series

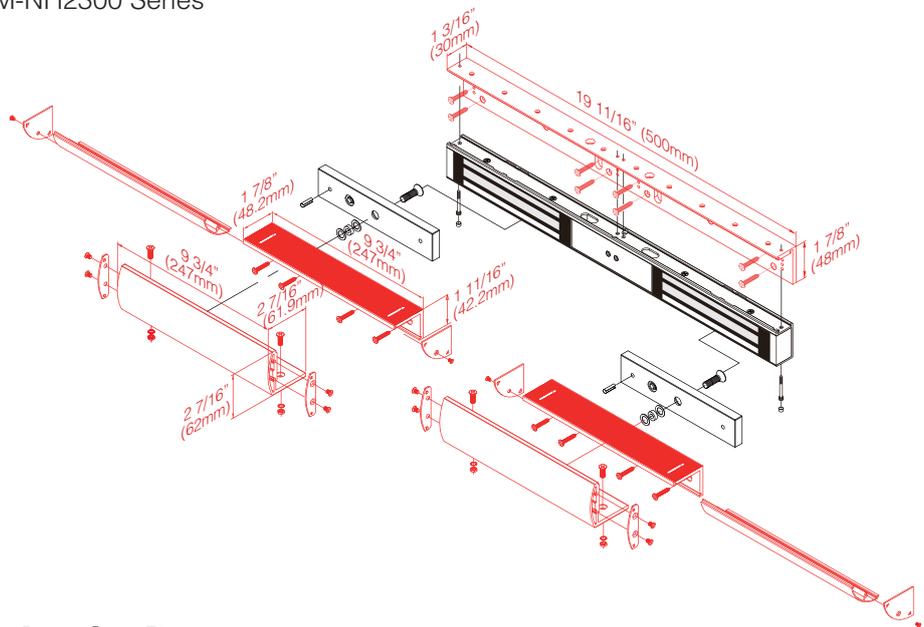

Installation of LZ bracket on Inswing Doors

- 1 Install L bracket on the door frame. Make sure the door may be opened / closed.
- 2 Fasten the electromagnet to L bracket with fixing screws.
- 3 Assemble Z bracket. Make sure it is still adjustable.
- 4 Insert the guide pins into the armature plate.
- 5 Fasten the armature plate to Z bracket. Insert the rubber washer between them.
- 6 Close the door and turn on the power.
- 7 Let the armature plate and electromagnet bond together. Press Z bracket to the door leaf.
- 8 Finish Fasten Z bracket to the door leaf.