


## Dimensions

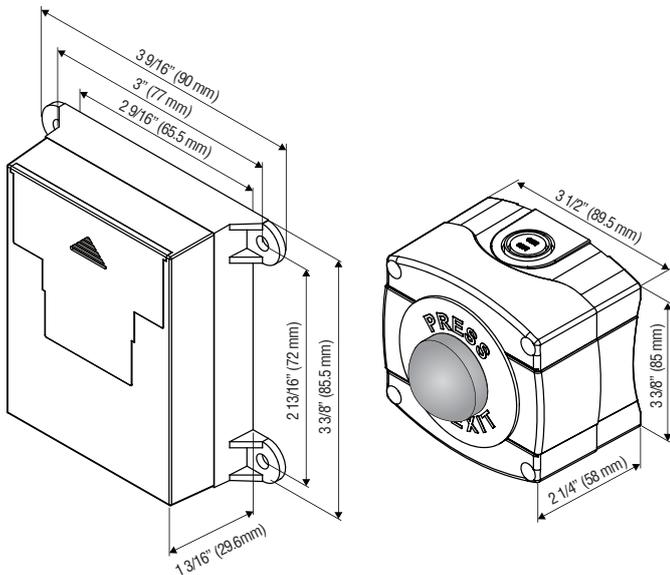

### Warranty

The product is warranted against defects in material and workmanship while used in normal service for a period of 1 year from the date of sale to the original customer. The GEM policy is one of continual development and improvement; therefore GEM reserves the right to change specifications without notice.

## Wireless Exit Device

# WPB-090WP

## Convenient and Quick Egress

The WPB-090WP weatherproof exit button adopts NEMA 4/IP65 rated enclosure and ensures strength and durability in indoor and outdoor environment. It is surface mounted and is easy to install with no need to drill holes.

The enclosure protects the electronics within from exposure to weathering and dust.

### RF Hopping Code Controller Features

- Designed to control automatic doors or electrified locks with code-hopping technology
- Bi-color LED to indicate transgression: Green (Power), Red (input/output)
- Low battery buzzer alarm
- Accommodates up to 15 transmitters
- Selectable time delay

### Transmitter Specifications

- Battery voltage 12VDC (23A Alkaline Battery)
- Frequency 433.3MHz
- Battery life max. 13,000 cycles
- Transmitting distance 50 ~ 60 meters

### RF Hopping Code Controller



#### S-RC-WPB-025JS

- Voltage: 12-24 VDC
- SPDT Rating: 3A/120VAC, 3A/24VDC
- Selectable Time Delay: 1,3,5,10 seconds
- 83 (L) x 62(W) x 30(D)mm

### Transmitters



#### S-TM-WPB-090WP

- Enclosure Rating: IP65 NEMA 4/4x/13
- 89.5 (L) x 85(W) x 58(D)mm

### Wireless Exit Device Kits



#### WPB-090WP