

# Resettable Call Points

## CP-42 Series



**CP-42G-LB**  
**CP-42GBZ-LB**




**CP-42GBZ-LZ-ALM**

The GEM Resettable Call Point features a resettable operating element that produces no dangerous glass shards, making it suitable for use in high traffic areas, such as schools, shopping malls, or commercial buildings. It is supplied with double pole changeover contacts and available with backlit models for easy nighttime operation, or with buzzer models that include a built-in buzzer for emergency alert.

### Standard Features & Specifications

- Operating voltage: 12/24VDC
- Dimensions: 87x91x53 mm (with clear plastic cover)
- Contact resistance: 100mΩ
- Rating: Up to 3A 125VAC / 1.5A 250VAC
- Limit switch contact output
- Backlight illumination: Green (normal state), Red (activated)
- Built-in buzzer: 80 dB (For CP-42BZ-LB),  
85 dB (For CP-42BZ-LB-ALM)
- Plastic case: Green / Red / White / Yellow / Blue
- Reset key included

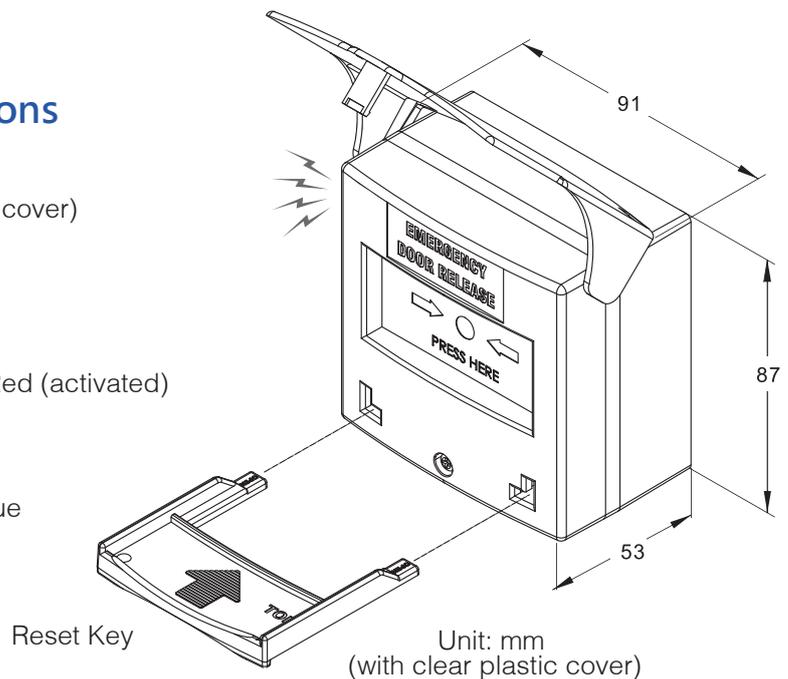

## CP-42 Series Resettable Call Points

Models	Contact	Built-in Buzzer	Red/Green Backlight	Alarm output	Case Colors
<b>CP-42G-LB</b>	Double pole	—	●	—	<u>G</u> reen, <u>R</u> ed, <u>Y</u> ellow, <u>W</u> hite, <u>B</u> lue
<b>CP-42GBZ-LB</b>	Double pole	●	●	—	<u>G</u> reen, <u>R</u> ed, <u>Y</u> ellow, <u>W</u> hite, <u>B</u> lue
<b>CP-42GBZ-LZ-ALM</b>	Double pole	●	●	●	<u>G</u> reen, <u>R</u> ed, <u>Y</u> ellow, <u>W</u> hite, <u>B</u> lue

## Accessories

P-PL-CP-32-K  
Reset key



P-PL-CP-32-UC  
Clear plastic cover



## Backlight Illumination

The CP-42 series features backlight illumination that changes from green to red after pressing the operating element.



### Warranty

The product is warranted against defects in material and workmanship while used in normal service for a period of 1 year from the date of sale to the original client. The GEM policy is one of continual development and improvement; therefore GEM reserves the right to change specifications without notice.