

Digital Keypad System

Standalone DG Series

DG-120 Standard Flush/Surface Mount Keypad



Standard Features


- Red, yellow, green LED indicators and built-in buzzer for status programming feedback
- Door sensor input for anti-tailgating operation to ensure higher security access control
- Dual relays to control door lock and other security devices
- Keypad tamper lockout (Invalid 32 digit code length maximum)
- Adjustable relay output time from 1 to 99 seconds or latching (on/off)
- Mounts to ANSI standard surface or recessed single-gang boxes
- Non-volatile memory protects programmed information in case of power loss
- Available with dark and light colored keys



Specifications

Models	Voltage	Current	Users	PIN Code Digits	Inputs	Outputs	Keypad Housing
DG-120	12 to 24 VDC	40mA Pull-in, 10mA Holding at 12 or 24 VDC	49 +50	5	1 REX input 1 Door sensor input	2 Relays (NC/COM/NO) 0.4A/120VAC, 2A/30VDC	Black Plastic ABS

Dimensions

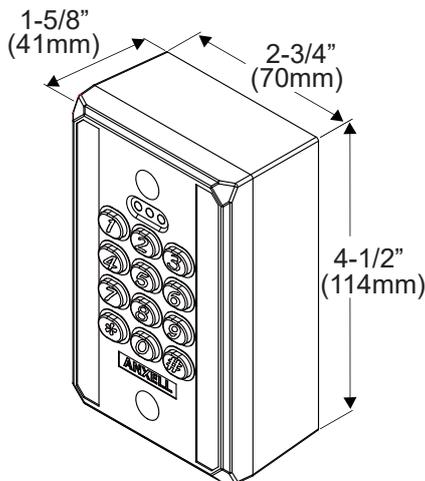

Warranty

The product is warranted against defects in material and workmanship while used in normal service for a period of 1 year from the date of sale to the original client. The GEM policy is one of continual development and improvement; therefore GEM reserves the right to change specifications without notice.

