

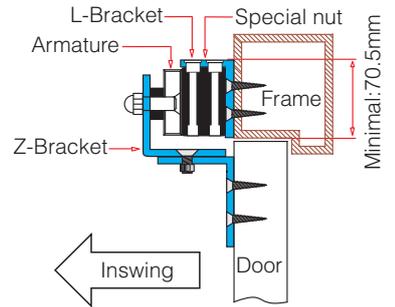


Inswing doors


# LZ-N10010ST Bracket




Application for the Electromagnet:  
N10001ST series

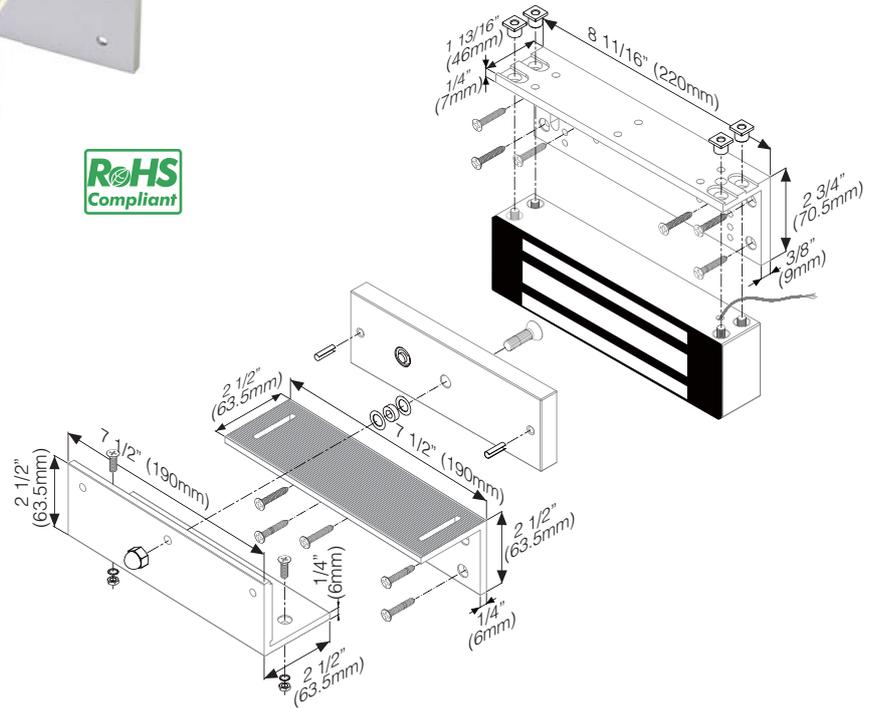


## With LZ bracket for inswing doors




1 Install L bracket on the door frame. Make sure the door may be opened / closed.




2 Fasten the electromagnet to L bracket with fixing screws.




3 Assemble Z bracket. Make sure it is still loose.




4 Insert the guide pins into the armature plate.




5 Fasten the armature plate to Z bracket. Insert the rubber washer between them.



6 Close the door and turn on the power.



7 Let the armature plate and electromagnet bond together. Press Z bracket to the door leaf.



Finish

8 Fasten Z bracket to the door leaf.