
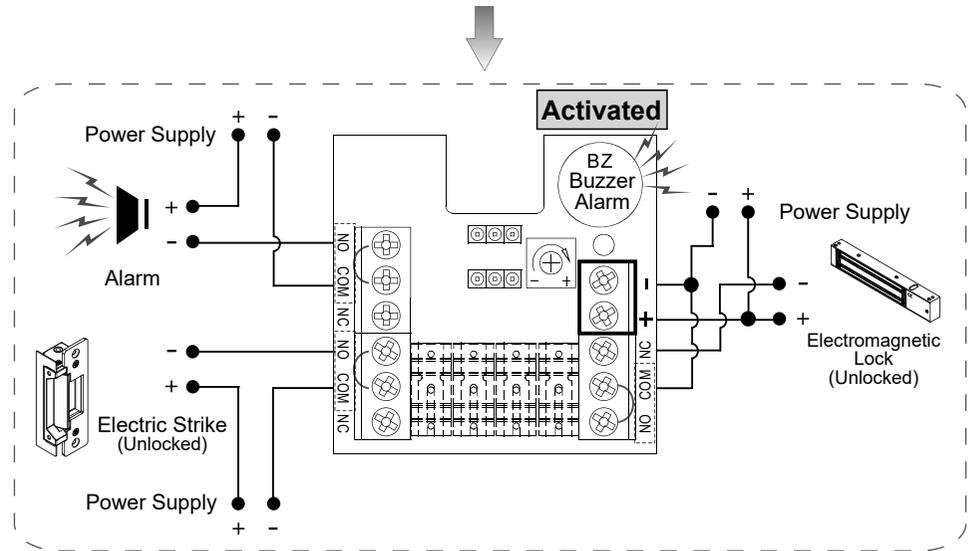
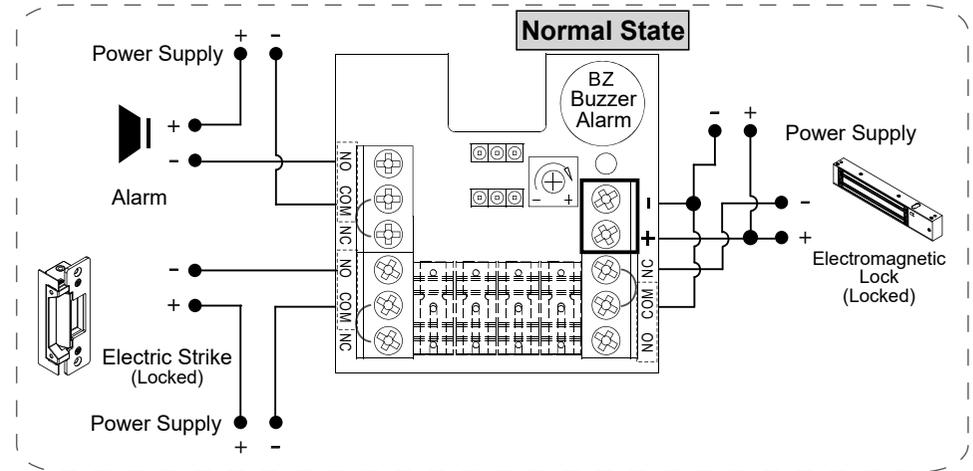
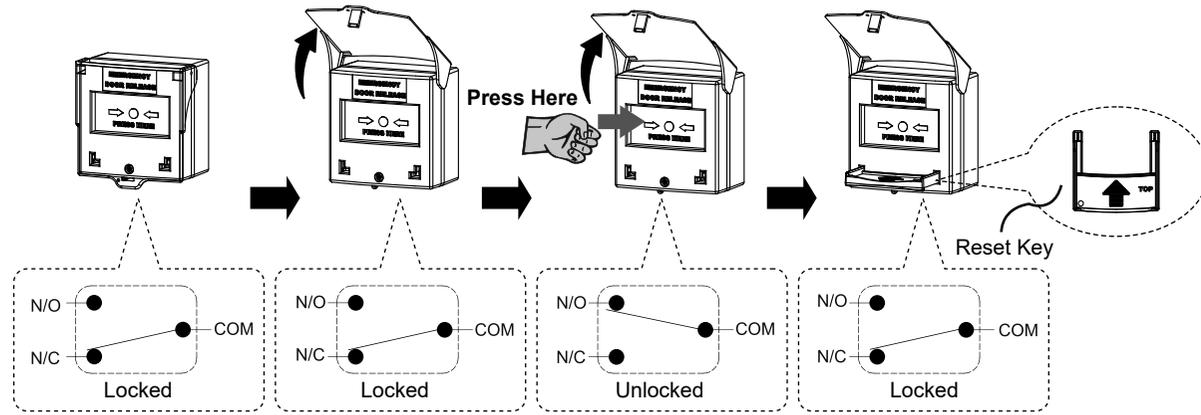



CP-43BZ-LB Series Buzzer & Backlight Resettable Call Point Instruction Manual

- Operating Voltage: 12/24VDC
- Dimensions: 87x91x53 mm (with clear cover)
- Contact Resistance: 100mΩ
- Switch Rating: 3A 125VAC / 1.5A 250VAC
- Three sets of signal output
- Backlight illumination: Green (normal state), Red (activated)
- Built-in buzzer: 80 dB (Volume adjustable, can be turned off or set to intermittent)
- Plastic Case Color: Green / Red / White / Yellow / Blue
- Reset key included

Part Number:
CP-43XBZ-LB
↓
Green **G**/Red **R**/White **W**
Yellow **Y**/Blue **BL**

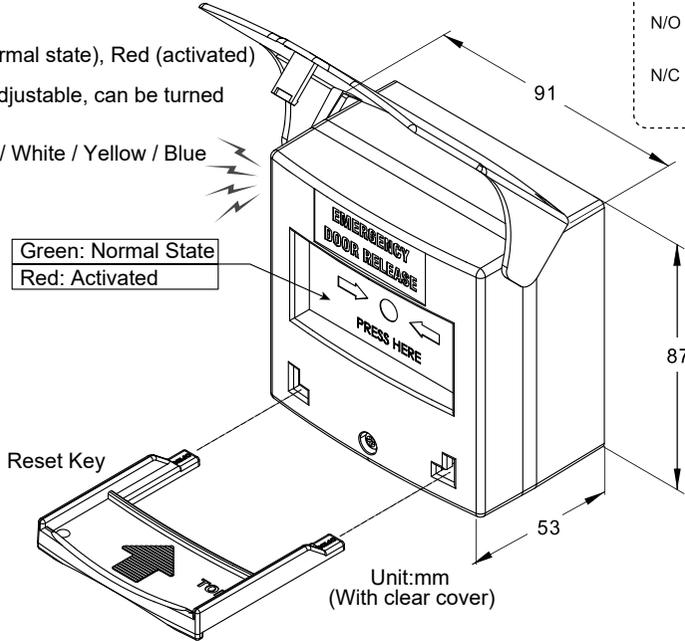

Settings


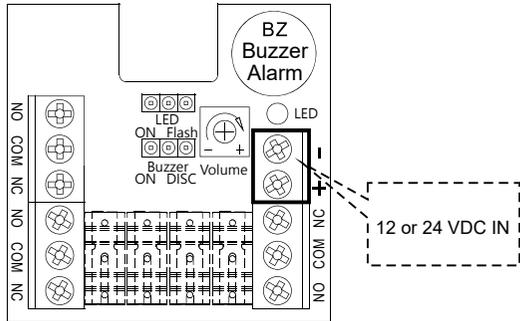


	Buzzer volume adjustment
	<ul style="list-style-type: none"> Red LED continuous Green LED continuous Red LED flashing (one second interval) Green LED continuous Red LED OFF Green LED continuous
	<ul style="list-style-type: none"> Buzzer continuous Buzzer beeps at one second interval Buzzer OFF

CP-43BZ-LB Series Mortise Mount Installation Instructions

Components

- 1 Plastic top cover
- 2 Main body
- 3 Reset key
- 4 Machine screw x1 (mortise mount only)
- 5 Self drilling screw x1 (surface mount only)
- 6 Hex nut x1
- 7 Hex nut spacer

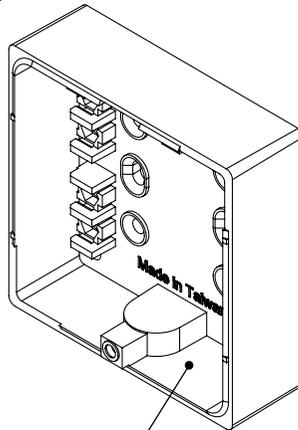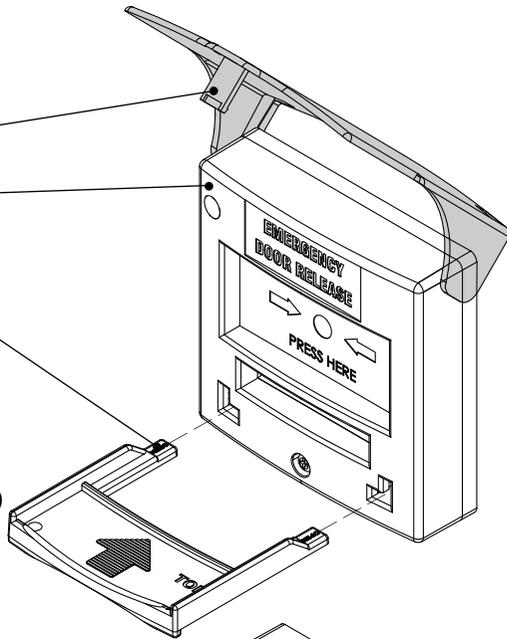

- 8 Base piece (Not needed in this installation method)

Recommend using 1 gang flush mount box conformed to BS4662 (Not included)

