


RøHS Compliant

## Bracket **LZ-500N Typical mounting on Inswing door**




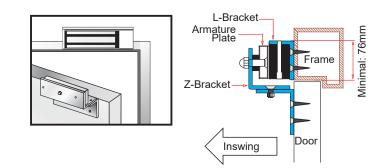


6.2 19n 6<sup>3.5</sup> 63.5 ĥ 16 190 0 63.5 Application for the Electromagnet: 10010, 10020, 10040, 10060 Series

Unit: mm


## Installation of LZ bracket on Inswing doors




Install L bracket on the door frame. Make sure the door may be opened / closed.




Fasten the armature plate to Z bracket. Insert the rubber washer between them.




Fasten the electromagnet to L bracket with fixing screws.




Closer the door and turn on the power.




Assemble Z bracket. Make sure it is still loose.



Let the armature plate and electromagnet bond together. Press Z bracket to the door leaf.



Insert the guide pins into the armature plate.



Fasten Z bracket to the door leaf.