

Call Point CP-43BZ-LB

Buzzer & Backlight Resettable




The GEM CP-43 Series Resettable Call Point features a reset mechanism that avoids glass shards, making it suitable for use in high traffic areas, such as schools, shopping malls, or commercial buildings.

It is designed with three sets of signal output which allows it to connect with electric locks and other accessories such as an alarm. The call point also features a built-in volume adjustable 80dB buzzer which can be set to continuous, beeping at one second interval or turned off.

The green/red backlight illumination makes it easy to identify in the dark and the red LED can be set to continuous or flashing when the call point is activated.


Dimensions

Unit:mm

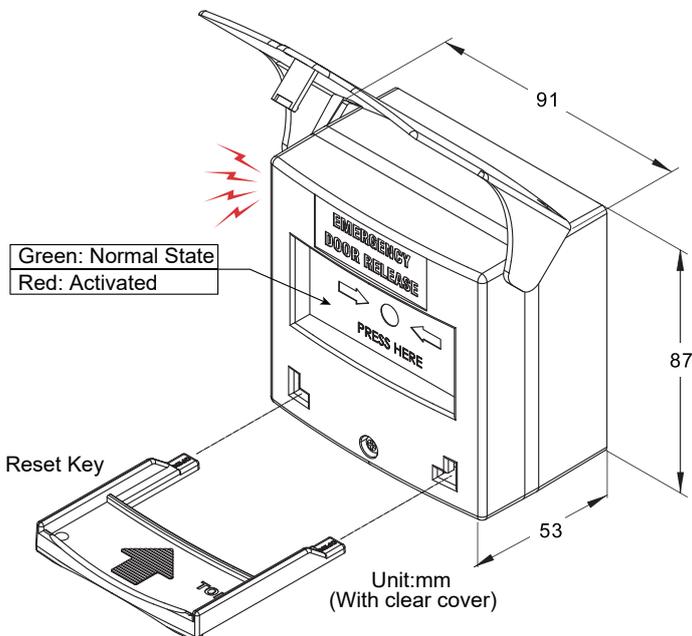

Specifications

- Operating Voltage: 12/24VDC
- Dimensions: 87x91x53 mm (with clear cover)
- Contact Resistance: 100mΩ
- Switch Rating: 3A 125VAC / 1.5A 250VAC
- Three sets of signal output
- Backlight illumination: Green (normal state), Red (activated)
- Built-in buzzer: 80 dB (Volume adjustable, can be turned off or set to intermittent)
- Plastic Case Color: Green / Red / White / Yellow / Blue
- Reset key included

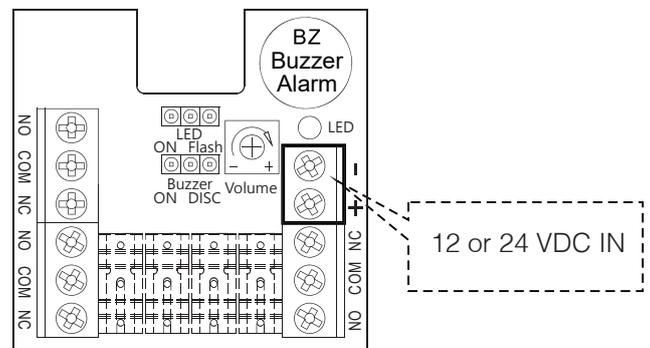

Settings

Volume	Buzzer volume adjustment
	<ul style="list-style-type: none"> Red LED continuous Green LED continuous Red LED flashing (one second interval) Green LED continuous Red LED OFF Green LED continuous
	<ul style="list-style-type: none"> Buzzer continuous Buzzer beeps at one second interval Buzzer OFF

Warranty

The product is warranted against defects in material and workmanship while used in normal service for a period of 1 year from the date of sale to the original client. The GEM policy is one of continual development and improvement; therefore GEM reserves the right to change specifications without notice.

